

Technical Specifications

CW614N

Alloy	
EN Symbol	CuZn39Pb3
EN No	CW614N
ASTM	C38500
DIN	20401

CW614N Chemical Composition								
	Cu	Pb	Sn	Fe	Ni	Al	Si	Zn
Min	57,00	2,20	-	-	-	-	-	-
Max	59,00	3,50	0,30	0,30	0,30	0,05	-	Kalan

CW614N-DW Chemical Composition								
	Cu	Pb	Sn	Fe	Ni	Al	Si	Zn
Min	57,00	2,50	-	-	-	-	-	-
Max	59,00	3,50	0,30	0,30	0,20	0,05	0,01	Kalan

Applications and Features

It is referred to as automatic rod due to its high machinability.

It is suitable for machining operations.

For use in potable water installations, the CW614N-DW alloy is used according to the 4MS and UBA lists.

Production Standard

Solid Bar for Machining (Chamfered)	EN 12164
Solid Bar for Forging	EN 12165
Hollow Bar for Machining (Chamfered upon request)	EN 12168
Profile for Machining	EN 12167

Heat Treatment

Annealing	450 – 550 °C	1 – 2 hours
Stress Relieving Annealing	200 – 320 °C	1 – 2 hours

Technical Properties

Structure		$\alpha+\beta$
Density	g/cm ³	8,46
Coefficient of Thermal Expansion	10-6/K	00021
Electrical Conductivity (%)	IACS	00028
Thermal Conductivity	W/(m K)	00123
Elastic Modulus	GPa	00105
Melting Temperature	°C	880-910

Machining Properties

Machinability	Very Good
Hot Forming (650-760 °C)	Poor
Cold Forming	Medium

Corrosion Resistance

Good Corrosion Resistance

EN 12164:2024 - Free Machining Rod Standard Mechanical Properties

Material Condition	Diameter		Parallel Surface (mm)		Tensile Strength Rm	0,2 % Yield Strength Rp 0,2		Elongation			Hardness	
	(mm)		(mm)		N/mm2 (MPa)	N/mm2 (MPa)		A100 mm (%)	A11,3 (%)	A (%)	(HBW)	
	Abv.	inc.	Abv.	inc.	Min	Min	Max	Min	Min	Min	Min	Max
M	All		All		As produced							
R360	3	60	5	55	360	-	350	-	15	20	-	-
H090	3	60	5	55	-	-	-	-	-	-	90	125
R430	3	60	5	40	430	220	-	6	8	10	-	-
H110	3	60	5	40	-	-	-	-	-	-	110	160
R500	3	20	5	10	500	350	-	-	3	5	-	-
H135	3	20	5	10	-	-	-	-	-	-	135	-

* Please contact us for R360 condition.

EN 12165:2024 - Forging Stock Standard Mechanical Properties

Material Condition	Diameter (mm)		Hardness	
	(mm)		(HBW)	
	Above	included	Min	max
M	All		As produced	
H080	5	110	80	125

* Mechanical properties are referenced according to the EN 12164:2024 standard.

EN 12168:2024 - Free Machining Hollow Rod Standard Mechanical Properties

Material Condition	Wall Thickness		Tensile Strength Rm	0,2 % Yield Strength Rp 0,2		Elongation	Hardness	
	(mm)		N/mm2 (MPa)	N/mm2 (MPa)		A (%)	(HBW)	
	Above	included	Min	Min	Max	Min	Min	Min
M	All		As produced					
R360	3	25	360	-	320	20	-	-
H090	3	25	-	-	-	-	90	125
R430	3	15	430	220	-	10	-	-
H110	3	15	-	-	-	-	110	160
R500	3	7	500	350	-	8	-	-
H135	3	7	-	-	-	-	135	-

*Hollow tubes are produced in M condition. Please contact us for special requests.

EN 12164:2024 - Free Machining Rod Standard Dimensional Tolerances

Dimensional tolerances of the round bar (including deviation from roundness)					Dimensional tolerances of the width between parallel surfaces of regular polygon bars
Nominal Diameter (mm)		Tolerance(mm)			
Above	Up to and including...	Class A	Class B	Class C	Tolerance(mm)
2	3	-0,04	-0,025	-0,015	-0,06
3	6	-0,05	-0,03	-0,020	-0,08
6	Poor	-0,06	-0,036	-0,025	-0,09
10	Medium	-0,07	-0,043	-	-0,11
18	30	-0,08	-0,052	-	-0,13
30	50	-0,16	-	-	-0,016
50	55	-0,19	-	-	-0,19

*Please contact us for Class C tolerances.

EN 12164:2024 - Free Machining Rod Length Standard

Length tolerance (mm) for bars in nominal lengths			
Nominal diameter or width between parallel surfaces		Preferred (Available) Lengths	Length Tolerances
Above	Up to and including...		
2	30	3000 or 4000	±0,50
30	50	3000 or 4000	±0,100
50	60	3000	±0,100

EN 12165:2024 - Round Forging Stock Diameter Tolerance

Nominal Diameter (mm)		Tolerance (mm)	
Above	Up to and including...	Class A	Class B
10	18	±0,25	±0,14
18	30	±0,30	±0,17
30	50	±0,60	±0,20
50	65	±0,70	±0,37
65	80	±0,70	-
80	110	±2	-

* For forged stocks, length and length tolerance are determined mutually. If no request is specified, the manufacturer will decide on the length.

EN 12168:2024 - Free Machining Hollow Rod Standard Dimensional Tolerances

Outer diameter or width between parallel surfaces tolerances					Wall Thickness Tolerance		Wall Thickness Tolerance (%)	Bore Diameter Tolerances			
Nominal outer diameter or distance between parallel surfaces (mm)		Tolerance(mm)			Nominal Wall Thickness (mm)			Nominal Bore Diameter (mm)		Bore Diameter Tolerance(mm)	
Above	inc.	Class A	Class B	Class C	Abv.	inc.		Above	inc.	Class A	Class B
17	18	-	-0,18	-0,11	2a	3	±12*Wall Thickness	10	18	±35	±14
18	30	-	-0,21	-0,13	3	6	±10* Wall Thickness	18	30	±42	±17
30	50	±0,31	-0,25	-0,16	6	10	±9* Wall Thickness	30	50	±80	±20
50	80	±0,60	-0,46	-0,30	10	-	±8* Wall Thickness	50	70	±95	±37

* For hollow tubes; The minimum outer diameter is produced as 19mm.

Minimum wall thickness is 3mm.

EN 12168:2024 - Free Machining Hollow Rod Length Standard

Length Tolerance (mm) for Bars in Nominal Lengths

Nominal Diameter or Width Between Parallel Surfaces		Preferred (Available) Lengths	Length Tolerances
Above	Up to and including...		
18	30	2700 - 4000	±0,50
30	50	2500 - 3500	±0,100
50	80	2000 - 3000	±0,100

Chamfer

Determining Shaped End Dimensions (mm)

Nominal Diameter D or Distance Between Parallel Surfaces W		Figure 1 – Chamfer, Length L		Figure 2 – Sharpened, Length L	
Above	Up to and including...	Min	Max	Min	Max
5	10	0,2	1,5	2,0	7,0
10	20	0,2	2,0	3,0	10,0
20	30	0,2	3,0	4,0	12,0

*Chamfering is done to remove burrs.

*Tapering is done for easy feeding of bars into automatic feeding devices.

*Please contact us for chamfering on products over 50mm.

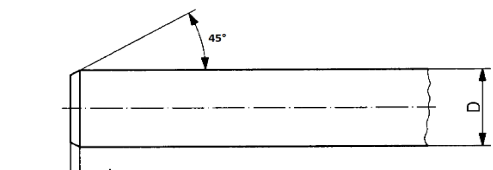


Fig.1 Chamfer

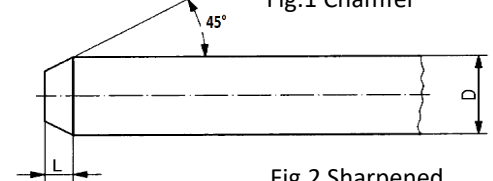


Fig.2 Sharpened

Stress Relieving

According to the EN 12164 standard, stress relieving annealing is not performed unless a special request is specified.

Stress relieving annealing is performed on all products that have undergone cold forming according to the EN 12168 standard.

Packaging

After chamfering, all products according to the EN 12164 and EN 12168 standards are packaged in thick nylon.

Bundles range from 500 to 1000 kg.

If there is a special request, the products are shipped in wooden crates.